



soberton inc.

# ST BUZZER

Acoustic Product Specification

Product Number: ST-03BLA



Release | Revision: B/2018

## CONTENTS

This document contains the technical specifications for the electromagnetic buzzer.

**Page 1**  
Specifications

Mechanical Characteristics

**Page 2**  
Environment Test

**Page 3**  
Reliability Test

Frequency Response Curve

**Page 4**  
Measurement Method

Recommended Driving Circuit

**Page 5**  
Soldering Conditions

**Page 6**  
Dimensions

**Page 7**  
Packing

## Specifications

| Item                                | Unit     | Specification      | Condition                    |
|-------------------------------------|----------|--------------------|------------------------------|
| Rated Frequency                     | Hz       | 2500               |                              |
| Rated Voltage                       | Vo-p     | 3.6                |                              |
| Operating Voltage                   | Vo-p     | 2.0 ~ 4.0          |                              |
| Mean Current                        | mA       | 100 Max.           | Vo-P = 1/2 duty, Square wave |
| Coil Resistance                     | Ω        | 16 ±3              |                              |
| Sound Pressure Level                | dB       | 85                 | At 10cm rated voltage        |
| Operating Temp                      | °C       | -20 ~ +70          |                              |
| Storage Temp                        | °C       | -30 ~ +85          |                              |
| Dimension                           | mm       | L8.5 × W8.5 × H3.0 | See attached drawing         |
| Weight                              | gram     | 0.8                |                              |
| Housing Material                    |          | LCP (Black)        |                              |
| Leading Pin                         | SMD type | Plating Sn         | See attached drawing         |
| Environmental Protection Regulation |          | RoHS               |                              |

## Test Condition

Temperature : +25±2 °C Relative Humidity: 65±5% Air Pressure: 86-106KPa

## Mechanical Characteristics

| Item                         | Test condition  | Evaluation standard   |
|------------------------------|---|---|
| Solderability                | Lead terminals are immersed in the solder bath at +250±5°C for 3±1 seconds.   | 90% min. lead terminals shall be wet with solder<br>No interference in operation.   |
| Soldering Heat Resistance    | The product follows the reflow temperature curve to test its reflow thermal stability.  |   |
| Terminal Mechanical Strength | The force 10 seconds of 9.8N is applied to each terminal in axial direction.  | No damage and cutting off   |
| Vibration                    | The part shall be subjected to a vibration cycle of 10Hz to 55Hz to 10Hz in a period of 1 minute. Total peak amplitude shall be 1.52mm(9.3G). The vibration test shall consist of 2 hours per axis in each three axes (X,Y,Z). Total 6 hours. | After the test the part shall meet specifications without any damage in appearance and performance except SPL. The SPL should be in ±10dBA compared with initial one. |
| Drop Test                    | The part is dropped from a height of 75cm onto a 40mm thick wooden board 3 times in 3 axes (X,Y,Z). Total of 9 times.   |   |



soberton inc.

# ST BUZZER

## Acoustic Product Specification

Product Number: ST-03BLA



Release | Revision: B/2018

### CONTENTS

This document contains the technical specifications for the electromagnetic buzzer.

#### Page 1

Specifications

Mechanical Characteristics

#### Page 2

Environment Test

#### Page 3

Reliability Test

Frequency Response Curve

#### Page 4

Measurement Method

Recommended Driving Circuit

#### Page 5

Soldering Conditions



#### Page 6

Dimensions

#### Page 7

Packing

## Environment Test
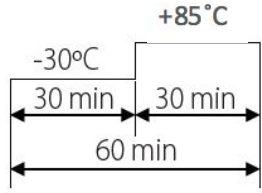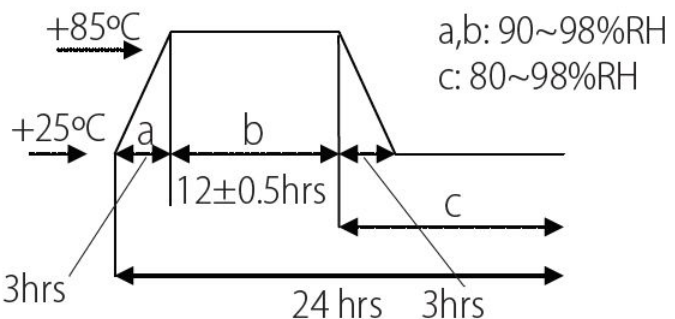
| Item                 | Test condition  | Evaluation standard  |
|----------------------|---|--|
| High Temp. Test      | The part is placed in a chamber at +85°C for 96 hours   | After the test the part shall meet specifications without any degradation in appearance and performance except SPL. After 4 hours at +25°C, the SPL should be in ±10dBA compared with initial one. |
| Low Temp. Test       | After placed in a chamber at -30°C for 96 hours   |  |
| Thermal Shock        | The part shall be subjected to 5 cycles. Each cycle shall consist of:<br>                  |  |
| Temp./Humidity Cycle | The part shall be subjected to 5 cycles. One cycle shall be 24 hours and consist of:<br> |  |

### Standard Test Condition:

- a) Temperature: +5~+35°C
- b) Humidity: 45~85%
- c) Pressure: 86~106KPa



soberton inc.

# ST BUZZER

## Acoustic Product Specification

Product Number: ST-03BLA



Release | Revision: B/2018

### CONTENTS

This document contains the technical specifications for the electromagnetic buzzer.

#### Page 1

Specifications

Mechanical Characteristics

#### Page 2

Environment Test

#### Page 3

Reliability Test

Frequency Response Curve

#### Page 4

Measurement Method

Recommended Driving Circuit

#### Page 5

Soldering Conditions

#### Page 6

Dimensions

#### Page 7

Packing


## Reliability Test

| Item                | Test condition  | Evaluation standard  |
|---------------------|---|--|
| Operating Life Test | <b>Ordinary Temperature</b><br>The part shall be subjected to 96 hours of continuous operation at +25°C±10°C.                 | After the test, the part shall meet specifications without any degradation in appearance and performance except SPL. After 4 hours at +25°C, the SPL would be in ±10dBA compared with initial one. |
|                     | <b>High Temperature</b><br>The part shall be subjected to 72 hours of continuous operation at +70°C at 3.6V, 2500Hz applied.  |  |
|                     | <b>Low Temperature</b><br>The part shall be subjected to 72 hours of continuous operation at -20°C with 3.6V, 2500Hz applied. |  |

### Standard test condition:

- a) Temperature: +5~+35°C
- b) Humidity: 45~85%
- c) Pressure: 86~106KPa

## Typical Frequency Response Curve

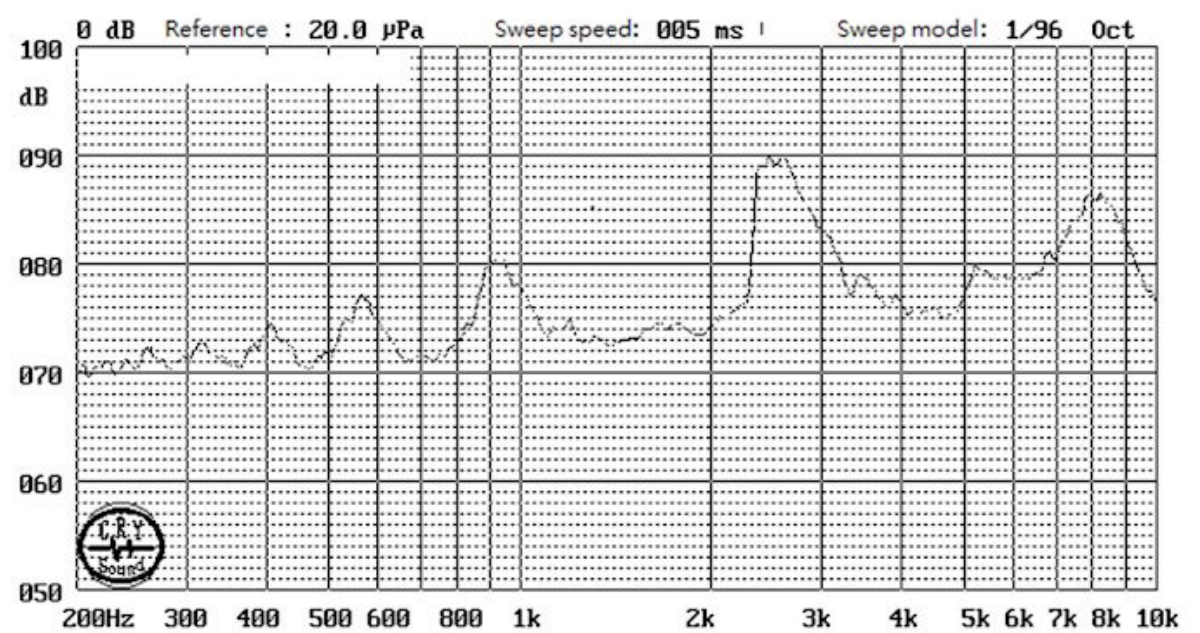



soberton inc.

# ST BUZZER

Acoustic Product Specification

Product Number: ST-03BLA



Release | Revision: B/2018

## CONTENTS

This document contains the technical specifications for the electromagnetic buzzer.

### Page 1

Specifications

Mechanical Characteristics

### Page 2

Environment Test

### Page 3

Reliability Test

Frequency Response Curve

### Page 4

Measurement Method

Recommended Driving Circuit

### Page 5

Soldering Conditions


### Page 6

Dimensions

### Page 7

Packing


## Measurement Method

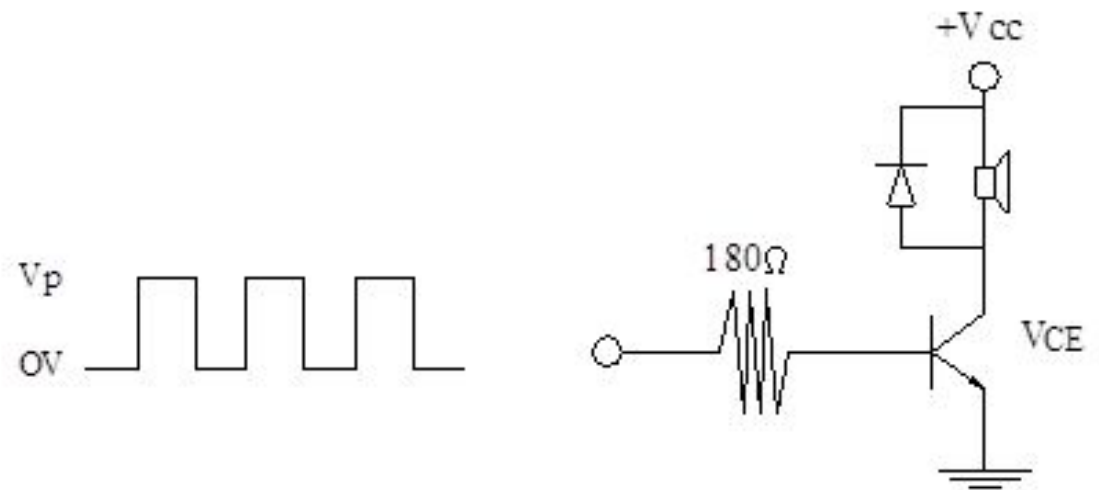

Measurement Method:

S.P.L Measuring Circuit

Input Signal: 3.6 Vo-p , square wave ½ duty, 2500Hz

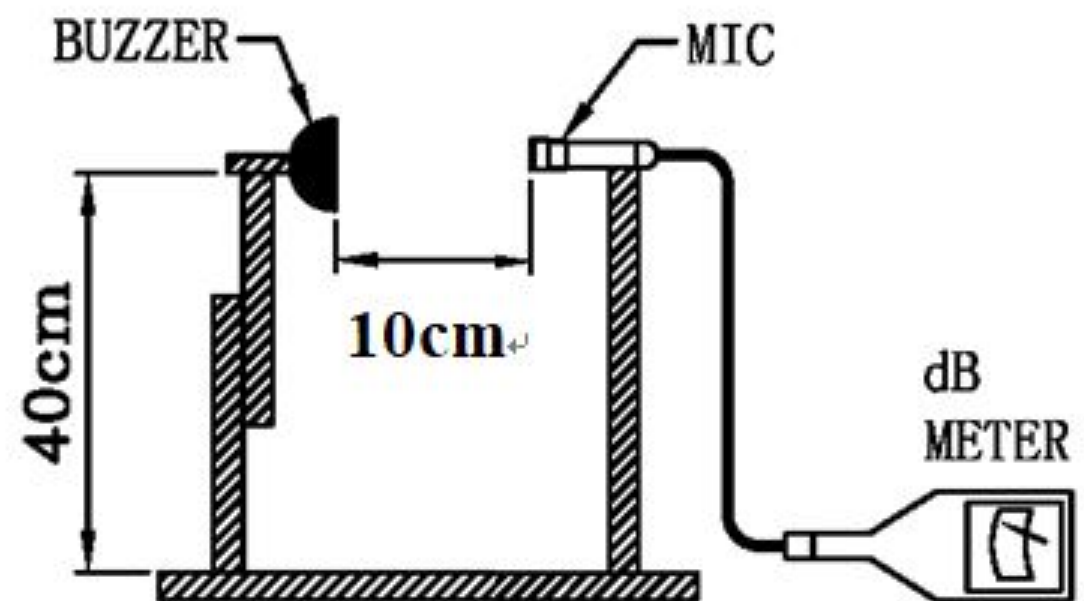


Mic: RION S.P.L meter UC30 or equivalent

S.G: Hewlett Packard 33120A Function Generator or equivalent

## Recommended Driving Circuit

The base current  $I_b$  should high enough so that it saturates the collector current of the transistor with the CB load.

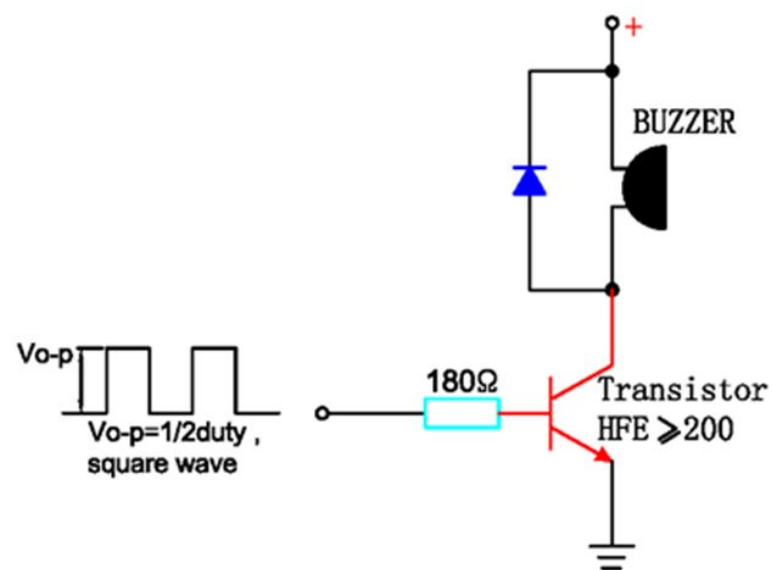



soberton inc.

# ST BUZZER

Acoustic Product Specification

Product Number: ST-04BLA



Release | Revision: B/2018

## CONTENTS

This document contains the technical specifications for the electromagnetic buzzer.

### Page 1

Specifications

Mechanical Characteristics

### Page 2

Environment Test

Reliability Test

### Page 3

Testing Method

Frequency Response Curve

### Page 4

Recommended Driving Circuit

Soldering Conditions

### Page 5

Dimensions

### Page 6

Packing


## Soldering Conditions

Recommendable reflow soldering condition is as follows (Reflow soldering is twice)  
Note: It is requested that reflow soldering should be executed after heat of product goes down to normal.

Recommendable wave soldering condition is as follows:

**Note 1:** It is requested that reflow soldering should be executed after heat of product goes down to normal temperature.

**Note 2:** Peak reflow temperature of 250°C maximum of 10 seconds, with a maximum duration of 40-60 seconds between 220°C and 250°C

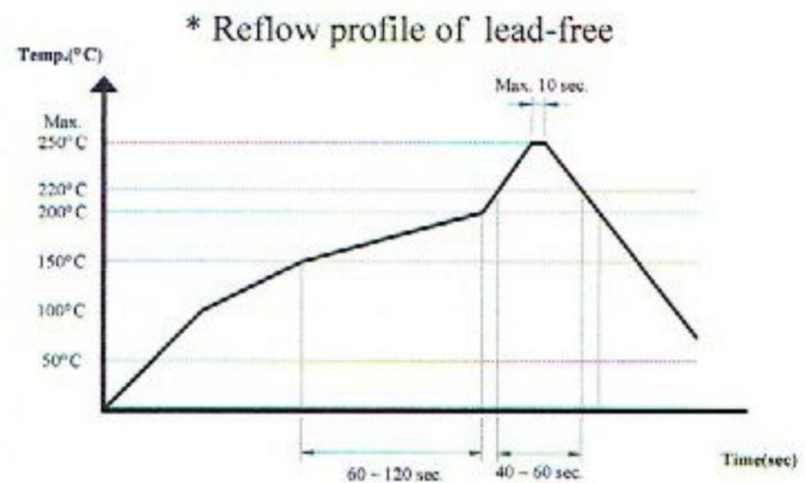




soberton inc.

# ST BUZZER

Acoustic Product Specification

Product Number: ST-03BLA



Release | Revision: B/2018

## CONTENTS

This document contains the technical specifications for the electromagnetic buzzer.

### Page 1

Specifications

Mechanical Characteristics

### Page 2

Environment Test

### Page 3

Reliability Test

Frequency Response Curve

### Page 4

Measurement Method

Recommended Driving Circuit

### Page 5

Soldering Conditions

### Page 6




Dimensions

### Page 7

Packing

## Dimensions

Tolerance:  $\pm 0.5$  (unit: mm)

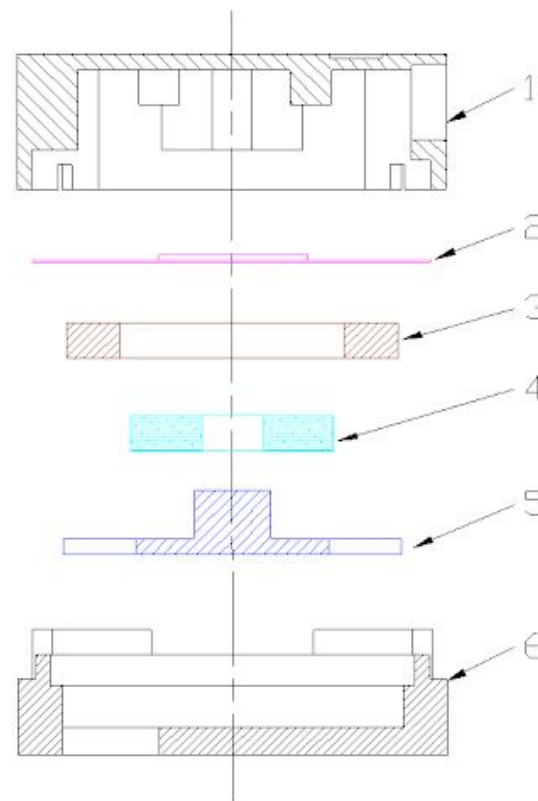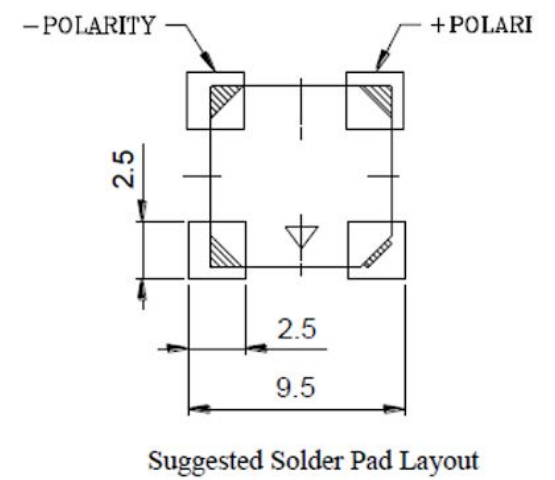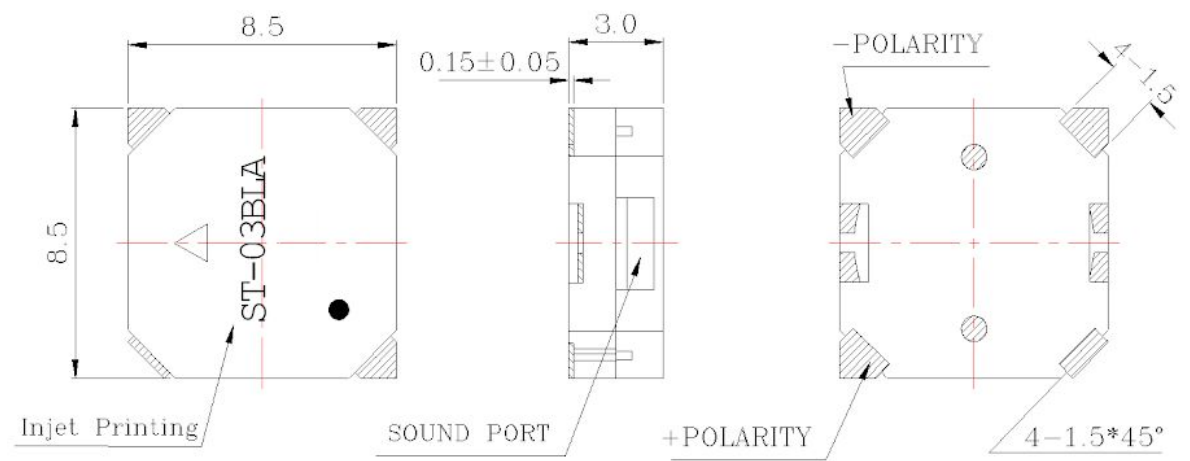

| No. | Part Name   | Material              | Quantity |
|-----|-------------|-----------------------|----------|
| 1   | Cover       | LCP                   | 1        |
| 2   | Diaphragm   | Nickel alloy + ferrum | 1        |
| 3   | Magnet ring | NdFeB                 | 1        |
| 4   | Coil        | Copper                | 1        |
| 5   | Frame       | Iron                  | 1        |
| 6   | Case        | LCP                   | 1        |



soberton inc.

# ST BUZZER

Acoustic Product Specification

Product Number: ST-03BLA



Release | Revision: B/2018

## CONTENTS

This document contains the technical specifications for the electromagnetic buzzer.

### Page 1

Specifications

Mechanical Characteristics

### Page 2

Environment Test

### Page 3

Reliability Test

Frequency Response Curve

### Page 4

Measurement Method

Recommended Driving Circuit

### Page 5

Soldering Conditions

### Page 6

Dimensions

### Page 7

Packing

## Packing

